

Keysight Technologies

N8241A Arbitrary Waveform Generator

Synthetic Instrument Module 1.25 GS/s or 625 MS/s

Technical Overview



Unlocking Measurement Insights



Introduction

- 15 bits of vertical resolution per channel and either 1.25 Gigasamples per second (GS/s) or 625 Megasamples per second (MS/s) provides exceptionally realistic wideband waveforms
- Dual output channels drive both single-ended and balanced designs without the need for baluns or hybrids.
- Extended waveform memory and advanced sequencing engine offers long scenario simulations.
- Multiple module synchronization provides multi-emitter simulations
- Multiple programmatic interfaces enable easy integration into existing test environments
- Fully compliant to LXI Class A standards

Generate Wide Bandwidth and Low EVM Signals Simultaneously

The Keysight Technologies, Inc. N8241A arbitrary waveform generator (AWG) is capable of creating high-resolution waveforms for radar, satellite, and frequency agile communication systems.

Each channel of the N8241A operates at either 1.25 GS/s sample rate (Option 125) or 625 MS/s sample rate (Option 062) and features 15 bits of vertical resolution giving designers the most realistic, wideband waveforms available from a commercial AWG. This LXI synthetic instrument module offers dual differential output channels to drive both single-ended and balanced designs. The AWG also supports advanced sequencing and triggering modes to create event-based signal simulations. Multiple N8241A modules can be synchronized for the generation of phase-coherent, multi-emitter scenarios.

Waveform development tasks are simplified using the AWG's numerous programmatic interfaces including complete instrument control from the MATLAB command line. When the N8241A is combined with a wideband I/Q upconverter, modulation bandwidths of 1 GHz can be realized at microwave frequencies for authentic signal simulations for IF and RF subsystem test.¹

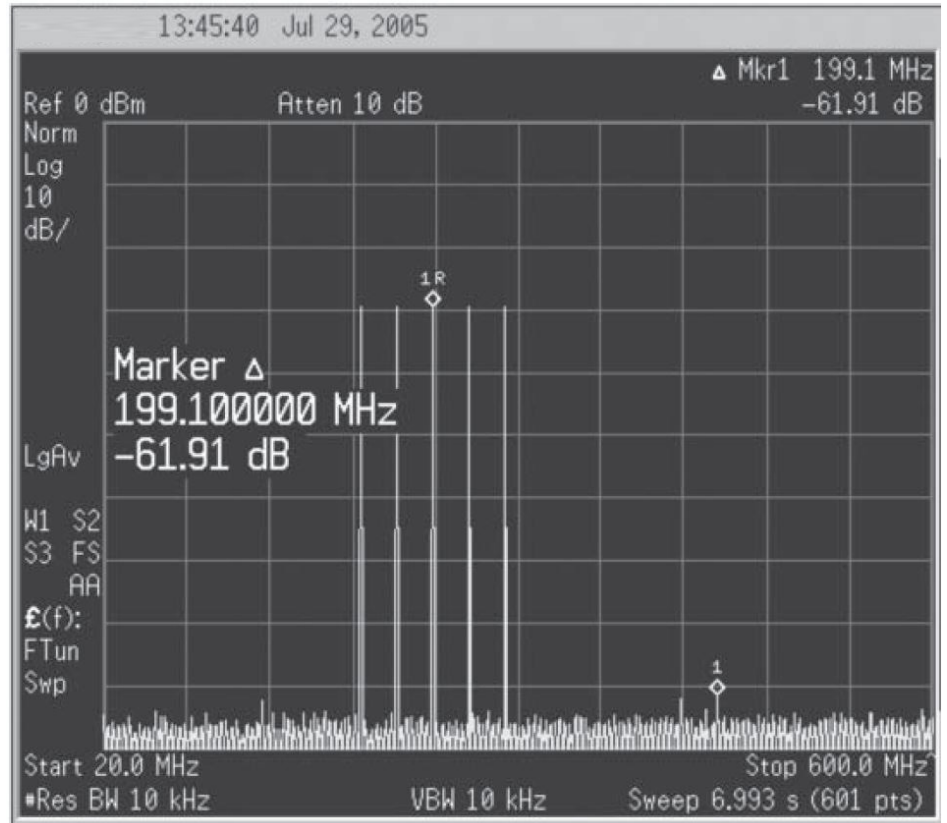


Figure 1. Generate wideband waveforms with unprecedented signal fidelity.

Unprecedented performance

The N8241A gives designers access to the most advanced Digital-to-Analog (DAC) technology available in a commercial AWG. Each module incorporates two high-speed DACs to create 500 MHz of signal bandwidth and ≤ -65 dBc spurious free dynamic range (SFDR) across each channel. Users have the choice of driving their designs differentially from the DAC outputs or single-ended through multiple signal-conditioning paths.

Although some AWGs require users to make a trade-off between the number of output channels and differential outputs, the N8241A provides both – allowing you to drive your designs and eliminating the need for baluns or hybrids in the test path. In addition, each channel can output waveforms as an IF or as a baseband signal for I/Q up conversion.

1. Keysight E8267D PSG signal generator with Option 016, wideband differential external I/O inputs.

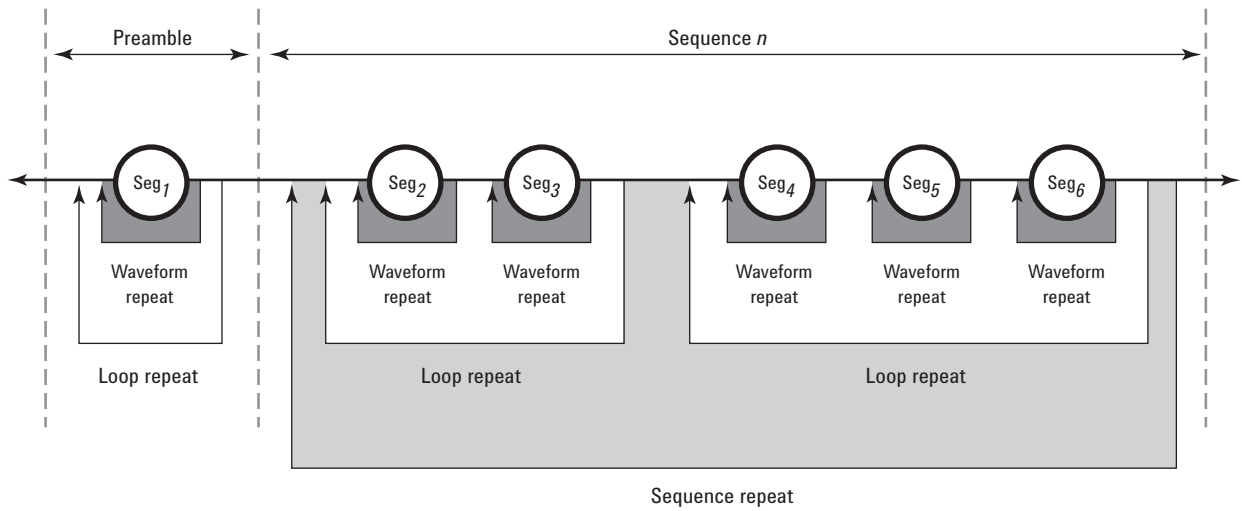


Figure 2. Create sophisticated signal scenarios by looping and nesting waveforms.

Create long scenario simulations

Multiply the effective size of on-board memory through the use of the N8241A's advanced sequencing engine. Uniquely define how waveform segments are played through looping and nesting of stored waveforms. This capability also gives users the ability to create new signals from existing waveforms by playing only subsegments of waveform memory.

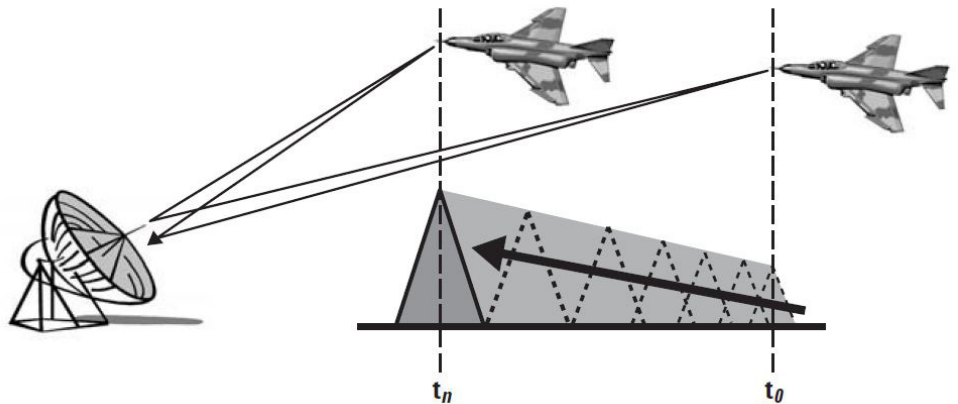


Figure 3. Closing targets can be simulated by ranging parameters on each pulse.

System scalability

Create phase-coherent, multi-emitter simulations using the N8241A's precision SYNC clock. A single N8241A can drive a total of eight AWG modules to synchronize their outputs on a sample-by-sample basis. Any number of modules can be synchronized with simple driver hardware. The AWG also includes multiple front-panel trigger and markers for complete system synchronization.

Ease-of-use

The N8241A's graphical user interface guides developers through module setup and waveform file transfers. Users can quickly configure the instrument's signal conditioning paths, marker and trigger lines, sample and reference clock sources and simple sequencing functions. More sophisticated sequencing functions are available through the instrument's numerous programmatic interfaces. The N8241A supports interfaces for MATLAB, LabView, IVI-C, and VEE framework.



Figure 4. The N8241A's compact modular size is perfect for integrating into ATE system racks.

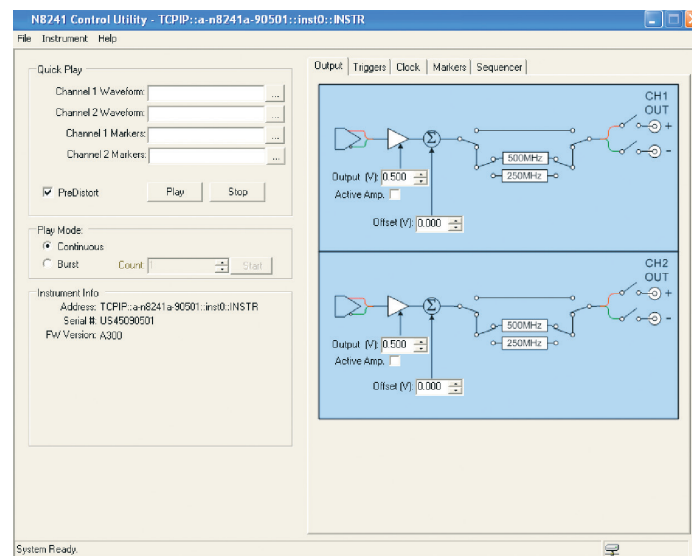


Figure 5. Directly import and play waveforms from the Quick Play menu.

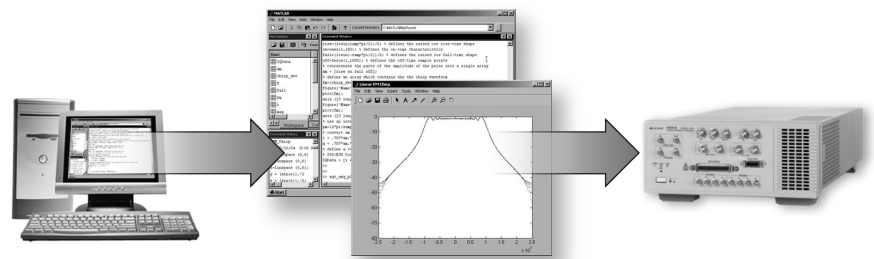


Figure 6. Play waveform files directly from the MATLAB command line.

Enhanced capabilities for the N8241A

Dynamic Sequencing (Option 300)

The dynamic sequencing software enables radar and military communications engineers to build custom signal scenarios on the fly. Engineers can dynamically access up to 16 k of previously stored sequences through a 16-bit interface and replay these complex waveforms to respond to changing threat environments, or to create signals where the next waveform to be played is not known in advance.

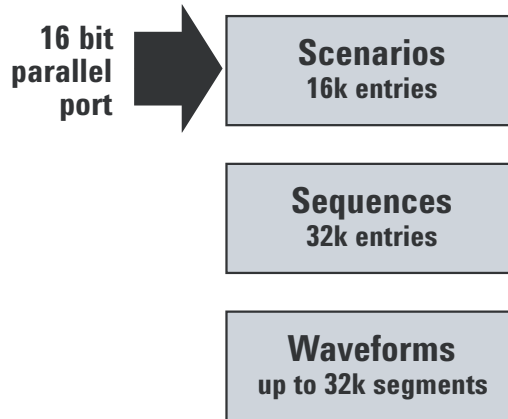


Figure 7. Create signals where the next waveform to be played is not known in advance.

Direct Digital Synthesis (Option 330)

The direct digital synthesis (DDS) software enables radar and emerging communications engineers to create basic waveforms in the AWG's memory and then modify their behavior with profiles for amplitude modulation, phase modulation, and frequency modulation. This enables engineers to simulate testing without the time and expense of field trials, such as in-flight and in-orbit testing. This option can also be used to simulate fading profiles in receiver testing for satellite and 4 G signals, such as multiple input, and multiple output formats (MIMO).

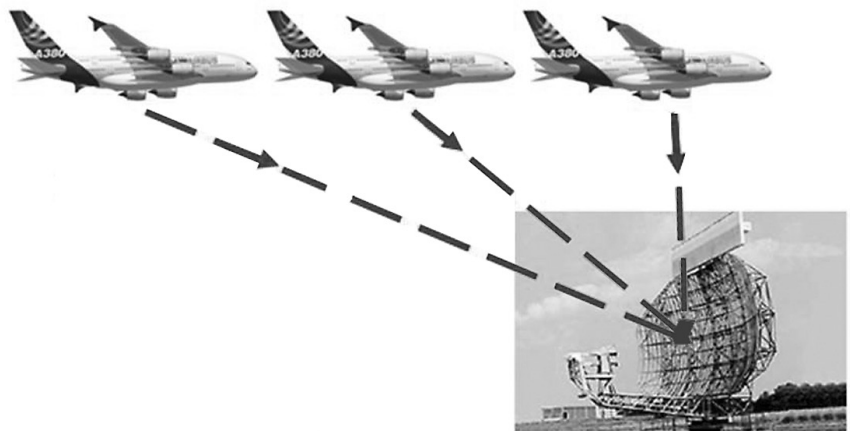


Figure 8. Define signals by carrier frequency and modulation – instant by instant.

Key Characteristics

	1.25 GS/s sample rate (Option 125)	625 MS/s sample rate (Option 062)
Channels	Two independent channels available as baseband or IF outputs <ul style="list-style-type: none"> - CH1: Single-ended and differential - CH2: Single-ended and differential 	
Modulation bandwidth	500 MHz per channel (1 GHz I/Q bandwidth)	250 MHz per channel (500 MHz I/Q bandwidth)
Resolution	15 bits (1/32,768 levels)	
Output spectral purity - (CH1 and CH2)		
Harmonic distortion	≤ -65 dBc for each channel DC to 500 MHz	≤ -65 dBc for each channel DC to 250 MHz
Non-harmonic spurious	≤ -75 dBc for each channel 1 kHz to 500 MHz	≤ -75 dBc for each channel 1 kHz to 250 MHz
Noise floor	≤ -150 dBc/Hz across the channel bandwidth	≤ -150 dBc/Hz across the channel bandwidth

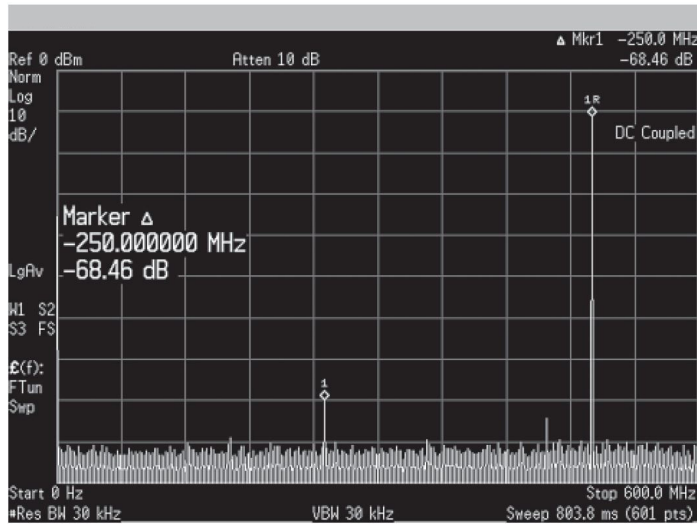


Figure 9. Excellent harmonic and spurious performance are available across the full bandwidth of each channel.

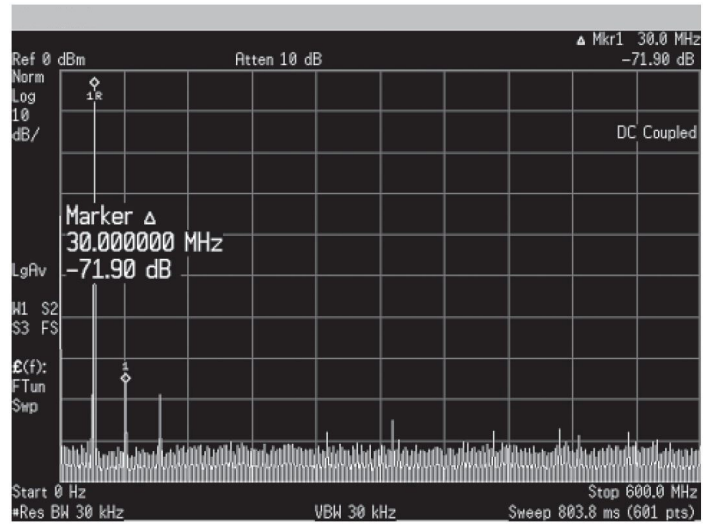


Figure 10. Spurious performance outstanding at low signal frequencies.

Key Characteristics (continued)

Sample clock	
Internal	Fixed 1.25 GS/s (Option 125) Fixed 625 MS/s (Option 062)
Internal clock output	+3 dBm, nominal
External clock input	Tunable 100 MS/s to 1.25 GS/s (Option 125) Tunable 100 MS/s to 625 MS/s (Option 062)
External clock input drive level	+5 to -15 dBm, typical
Phase noise characteristics	1 kHz: -95 dBc/Hz 10 kHz: -115 dBc/Hz 100 kHz: -138 dBc/Hz 1 MHz: -150 dBc/Hz
Noise floor	-150 dBc/Hz
Accuracy	Same as 10 MHz timebase input
Frequency reference	
Input drive level	+2 to +12 dBm into 50 Ω (+2 dBm, nominal)
Waveform length	
Minimum waveform length	128 samples
Waveform granularity	8 samples
Segments	
	1 to 32 k unique segments can be defined consisting of waveform start and stop address repetitions, and marker enable flags.
Segment loops	
	A total of 1 million (2 ²⁰) loops can be defined for each segment. Loops can be configured to advance in one of four modes: <ul style="list-style-type: none"> - Single: The segment loop plays once and waits at the end of the loop for a trigger. - Continuous: Segment loop is repeated continuously until a trigger is received. - Auto: Automatically advances to the next segment after completing the specified number of loop repetitions. - Repeat: The waveform loop repeats until the number of waveform loop repetitions is met.
Sequences	
	Up to 32 k total unique waveform sequences can be defined. A sequence is a contiguous series of waveform segments.
Advanced sequencing	
	Enables users to build and playback scenarios, which are comprised of one or more sequences.
Scenarios	
	1 to 16 k pointers can be assigned to play pre-defined sequences. Sequence play begins with the first sequence entry and continues uninterrupted until the last entry is played. The table repeats until stopped.
Sequence jump modes	
	Sequence jumps determine how a sequence responds to a jump trigger. There are no discontinuities in a sequence jump other than those imposed by the waveform data. Three modes are available to control sequence jumps: <ul style="list-style-type: none"> - Jump immediate: Jumps immediately to the next specified sequence address with a fixed latency. - End of waveform: The current segment (including waveform repeats) is completed before jumping to a new sequence. - End of sequence: The current sequence is completed before jumping to a new sequence. Jump latency is the longer of either the jump immediate latency or the length of the remaining sequence.

Key Characteristics (continued)

Dynamic sequencing (Option 300)		
Input	20-pin mini-D connector	
Input levels	All pins configured as 2.5 volt LVCMOS inputs. A logic low must fall within the -0.2 to +0.5 volt window. A logic high must be within the window of +2.0 to +2.8 volts.	
Number of address bits	13 bits per channel	
Total number of addressable scenarios	16 k	
Data rate for dynamic data	100 ns	
Data latency	Same as front panel trigger inputs. Software pointers may also be used to point to pre-defined scenarios, though latencies are not deterministic.	
Direct digital synthesis (Option 330)		
Output frequency resolution	1 Hz	
Frequency modulation	Deviation from 0 to 125 MHz (250 MHz peak-peak)	
Phase modulation	Deviation from -180 to +180 degrees in 0.022 degree steps	
Amplitude modulation	Modulation depth from 0 to 100% with 15 bit resolution	
Single channel bandwidth	400 MHz (800 MHz I/Q)	
External triggers		
Number of inputs	8 each (4 SMB female front-panel connectors plus four software triggers over the LXI interface from host processor)	
Trigger polarity	Negative/positive	
Trigger impedance	2 k ohms	
Maximum input level	±4.5 volts	
Input sensitivity	250 mV	
Trigger threshold	-4.3 volts to +4.3 volts	
Trigger timing resolution	Clock/8 (6.4 ns at 1.25 GS/s rate) (Option 125)	Clock/8 (12.8 ns at 625 MS/s rate) (Option 062)
Trigger latency	34 x clock/8 (217.6 ns at 1.25 GS/s rate) (Option 125)	34 x clock/8 (435.2 ns at 625 MS/s rate) (Option 062)
Trigger uncertainty	< 50 ps	
Minimum trigger width	12.8 ns at 1.25 GS/s clock rate (Option 125)	25.6 ns at 625 MS/s clock rate (Option 062)
Trigger delay	Programmable from 1 to 256 sync clock cycles with 1 sync clock cycle resolution ¹	
LXI triggering modes ²		
Driver command based	A driver interface on the controlling computer is used to directly transmit a command to the module.	
Direct LAN messaging	A data packet containing triggering information (including a time stamp) is sent directly from one module to another via the LAN.	
Time based events	An IEEE 1588 based time trigger is set and executed internally in a module.	
LXI trigger bus-based	A module function is triggered via a voltage on the LXI trigger bus.	

1. A sync clock cycle is clock/8

2. The LXI triggering conforms to the specifications of the LXI standard, revision 1.0, www.lxistandards.org

Key Characteristics (continued)

External markers			
Markers	Can be defined for each waveform segment		
Number of outputs	4 each SMB female		
Marker polarity	Negative, positive		
Output impedance	50 ohms		
Marker low level	100 mV nominal into high impedance load		
Marker high level	3.2 volts nominal into high impedance load		
Marker timing resolution	Clock/8 (6.4 ns at 1.25 GS/s rate) (Option 125)	Clock/8 (42.8 ns at 625 MS/s rate) (Option 062)	
Marker latency	Marker precedes analog output and is adjustable in 2 sample clock period steps.		
Marker latency repeatability	<100 ps		
Marker width	Programmable from 1 to 256 sync clock cycles ¹		
Marker delay	Programmable from 8 to 502 sample clock cycles, with 2 sample clock cycle resolution		
LXI markers	Two LXI markers are available		
Module synchronization	Supports system scaling for any number of N8241A modules. A single module can support a fan-out of 8 N8241A modules for precise triggering and repeatability. Driver boards may be used to scale any number of modules.		
Sync clock output level	800 mV p-p (50 ohms, AC coupled)		
Sync clock input sensitivity	100 mV p-p minimum into 50 ohms AC coupled		
Analog output			
Output connector	SMA female		
Output impedance	50 ohms		
Analog output levels		Single-ended	Differential
The following output levels are specified into 50 ohms	Passive mode	0.5 Vp-p	N/A
	Active mode	1 Vp-p with ± 0.2 V offset	N/A
	Direct DAC mode	N/A	1 Vp-p (0 volt offset)
Uncorrected passband flatness	± 1 dB DC - 200 MHz; ± 2.5 dB DC - 500 MHz (with 1.25 GHz clock)		
Uncorrected passband group delay	± 500 ps DC - 200 MHz; ± 1 ns DC - 500 MHz (with 1.25 GHz clock)		
Reconstruction filters	500 MHz and 250 MHz realized as 7-pole Cauer Chebychev filters plus thru-line output		
Pulse response	Rise time (10 to 90%): < 1 ns Fall time (10 to 90%): < 1 ns Amplitude: 0.5 Vp-p		

1. A sync clock cycle is clock/8

General Characteristics

LXI Class A Certified

Power

Line power 100/120/220/240 VAC, 50/60 Hz, 100 watts maximum

Environmental

Samples of this product have been type tested in accordance with the Keysight Environmental Test Manual and verified to be robust against the environmental stresses of storage, transportation, and end-use; those stresses include, but are not limited to temperature, humidity, shock vibration, altitude, and power line conditions. Test methods are aligned with IEC 60068-2 and levels are similar to MIL-PRF-28800F Class 3.

Operating temperature 0 to +50 degrees C (0 to 47 degrees C at 15,000 ft altitude)

Storage temperature -40 to +70 degrees C

Relative humidity

Type tested 0 to 95% at 40 degrees C (non-condensing)

Altitude 0 to 4500 m (15,000 ft) above sea level

Weight

5.66 kg (12.5 lb)

Security

All user data stored in volatile memory

Dimensions

Height 89 mm (3.5 inch)

Width 213 mm (8.375 inch)

Depth 422 mm (16.625 inch)

Calibration cycle

1 year warranty, platform calibration not required

ISO compliance

This instrument is manufactured in an ISO-9001 registered facility in concurrence with Keysight Technologies, Inc. commitment to quality.

Electrostatic Discharge Immunity – IEC 61000-4-2: passes criterion C

Testing according to IEC 61000-4-2: showed that the exposure of the data port to electrostatic discharge may interrupt operation of the N8241A/42A. Operation can be restored by reloading the desired waveforms and restarting. This required operator intervention results in a criterion C classification.

Ordering Information

N8241A 15-bit arbitrary waveform generator with 8 MS memory per channel

Model	Description
N8241A-125	1.25 GS/s sample rate
N8241A-062	625 MS/s sample rate
N8241A-016	Waveform memory expansion to 16 MS per channel
N8241A-300	Enabling software for 16-bit dynamic sequencing
N8241A-330	Direct digital synthesis software

Web Resources

Visit our web sites for additional product information and literature.

N8241A 15-bit arbitrary waveform generator:
www.keysight.com/find/synthetic

N6030A Series of arbitrary waveform generators:
www.keysight.com/find/awg

Signal simulation systems:
www.keysight.com/find/signalsimulation

Aerospace and defense test and measurement products and services:
www.keysight.com/find/ad

Test and measurement accessories:
www.keysight.com/find/accessories


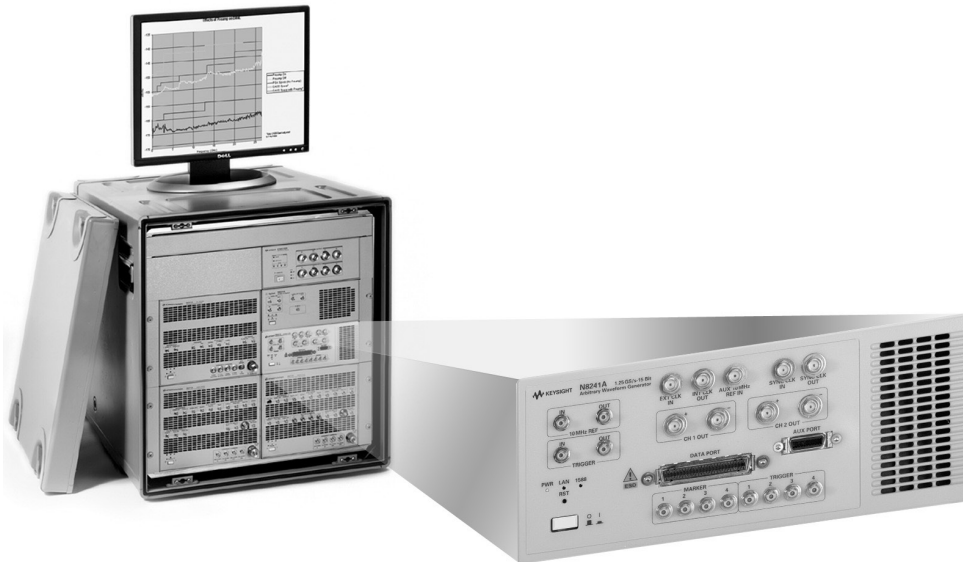


Figure 11. Keysight N8241A 15-bit arbitrary waveform generator LXI module

From Hewlett-Packard through Agilent to Keysight

For more than 75 years, we've been helping you unlock measurement insights. Our unique combination of hardware, software and people can help you reach your next breakthrough. **Unlocking measurement insights since 1939.**

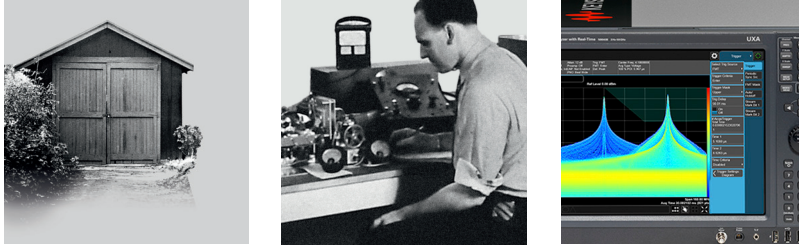

1939

THE FUTURE

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:
www.keysight.com/find/contactus
 (BP-02-10-16)



www.keysight.com/go/quality
 Keysight Technologies, Inc.
 DEKRA Certified ISO 9001:2015
 Quality Management System

myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.



www.lxistandard.org

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Keysight is a founding member of the LXI consortium.



www.keysight.com/find/ThreeYearWarranty

Keysight's committed to superior product quality and lower total cost of ownership. Keysight is the only test and measurement company with three-year warranty standard on all instruments, worldwide. And, we provide a one-year warranty on many accessories, calibration devices, systems and custom products.



Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

www.keysight.com/find/synthetic



Unlocking Measurement Insights

This information is subject to change without notice.
 © Keysight Technologies, 2009 - 2016
 Published in USA, May 30, 2016
 5989-2595EN
www.keysight.com